




# Disassembling Sony Clie PEG-SJ22 Outer Case

Written By: Samantha Taylor



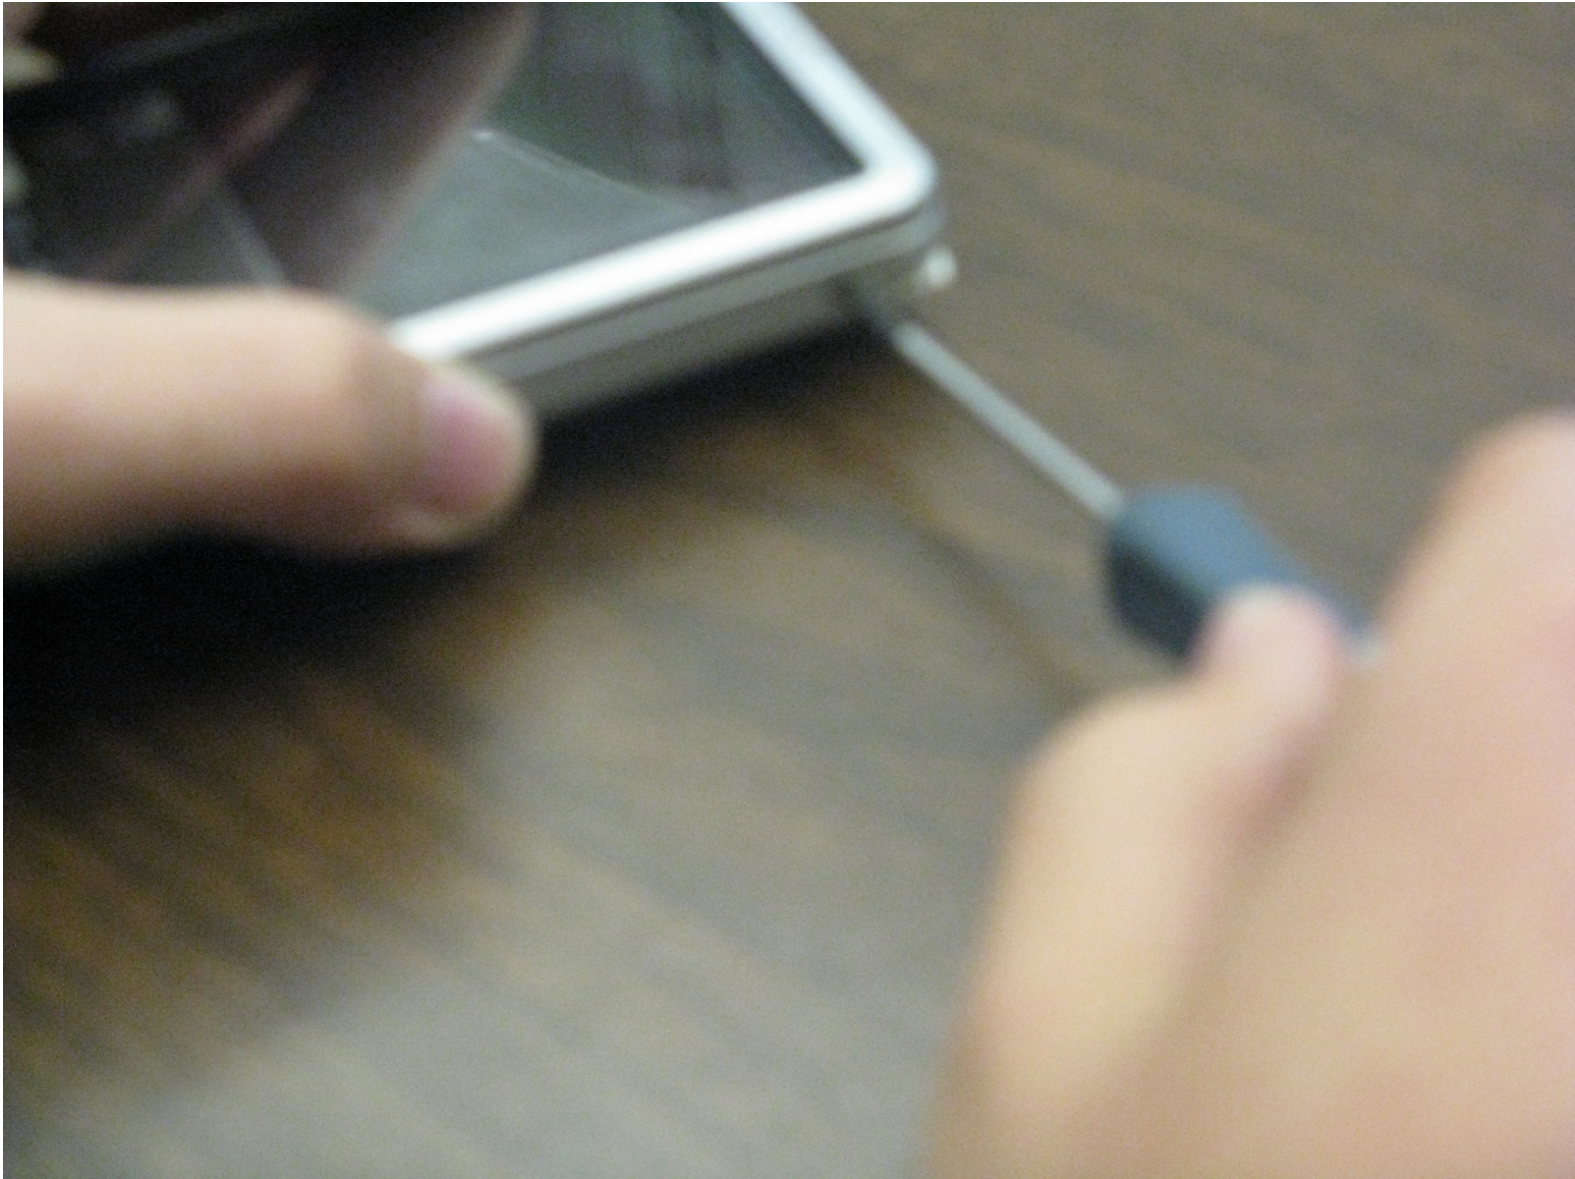

## TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-



## Step 1 — Outer Case



- 1. Unscrew the six screws on device. (2 screws on left side, 2 on right side, 2 on bottom)

## Step 2



- 2. With an iPod opening tool, lift the front cover (face plate) from the device.

## Step 3



- 3. Pull the screen out of the back case with iPod opening tool. The device should now be in three different parts.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 05:27:11 PM.